


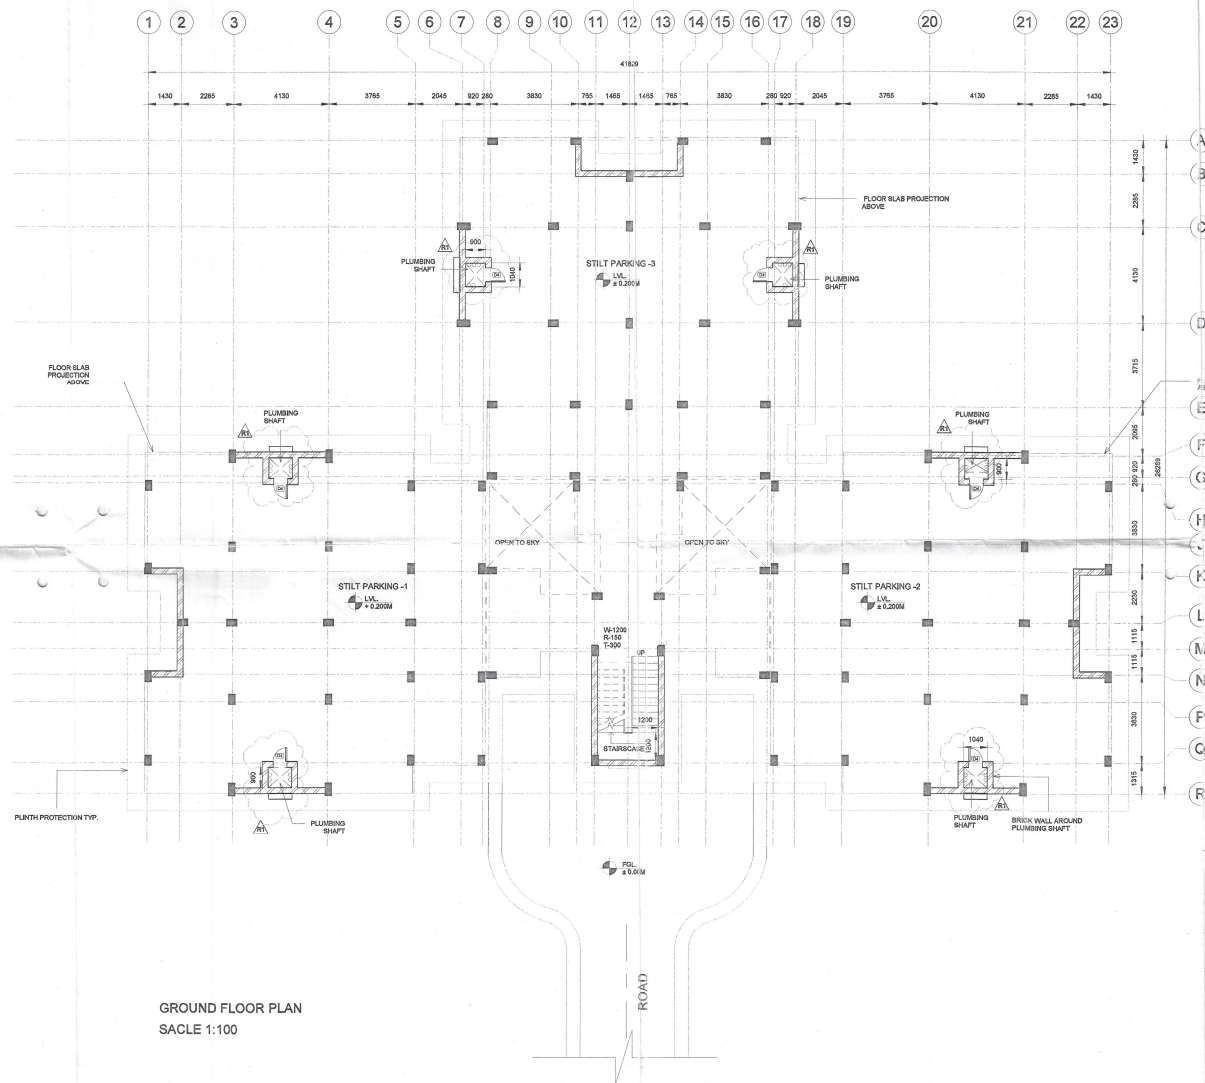


Drawing is approved
subject to overall
responsibility of the contractor
in terms of contract agreement
or, turn key for the work

Ravi
22.11.20
Chief Engineer (Civil-1)
BSPCL

Ravi
22.11.20
Superintending Engineer (Civil)
BSPCL

Ravi
22.11.20
Executive Engineer (Civil)
B.S.P.T.C.L.

Ravi
22.11.20
Assistant Engineer (Civil)
BSPCL



NOTES:-

1. ALL DIMENSIONS ARE IN MM AND LEVELS ARE IN METRES, UNLESS STATED OTHERWISE.
2. F.F.L. CORRESPONDS TO M.S.M. THE F.F.L. OF STILT/STY QUARTER BHK SHALL BE AS PER THE APPROVED DRAWINGS & LEVELLING DRAWINGS OF SUBSTATION.
3. PLINTH PROTECTION TO BE PROVIDED ALL ROUND THE BUILDING WHEREVER POSSIBLE.
4. SURFACE DRAINAGE OVER WINDOW IS AS PER DETAIL.
5. FOR SANITARY & PLUMBING DETAIL REFER SEPARATE DRAWING.
6. SIZES OF COLUMNS ARE AS INDICATED. SIZES SHALL BE AS PER STRUCTURAL DETAIL.
7. WALLS SHALL BE OF BRICK (230mm THK) MASONRY OF SIZE 20mm THK FC1 EXTERNAL WALLS & INTERNAL WALLS, WHEREVER INDICATED THE INTERNAL PARTITION WALLS SHALL BE 150mm THK.
8. ALL LEVELS ARE TO BE VERIFIED BEFORE THE START OF CONSTRUCTION.
9. COLOUR SCHEME FOR ALL ARCHITECTURAL WORKS SHALL BE SUBJECT TO APPROVAL OF THE OWNER/PMC.
10. PLINTH BEAM LEVEL, SIZE & LOCATION SHALL BE AS PER STRUCTURE.

LEGENDS:-

- F.F.L.- FINISH FLOOR LEVEL
- F.G.L.- FLOOR GROUND LEVEL
- T.O.G.- TOP OF CONCRETE
- W.- WINDOW
- D.- DOOR
- V.- VENTILATOR
- T.- TIE ROD
- R.- RISER

REV.	DATE	DESCRIPTION	DRAWN	CHECKD.	APPRVL.
R1	03-01-20	ISSUED FOR APPROVAL	TS	SM	BNC
R2	20-06-19	ISSUED FOR APPROVAL	TS	SM	BNC

BIHAR STATE POWER TRANSMISSION COMPANY LTD. (BSPCL)

TITLE : 2 BHK APARTMENT ARCHITECTURAL GROUND FLOOR PLAN

DWG. NO. : CD_2BJK_20-06

SCALE :- 1:100

SHEET : 01 OF 03

OPTION - 02